



65,536 colors and Ethernet interface



#### **Automation Solution**









Fresh start with XP series suits your every requirement.



#### Superb performance, convenient functions

- High and vivid distinction with 65,536 colors.
- Various vector symbols and high quality raster symbols.
- Support diverse file types including BMP, JPG, GIF, and WMF, etc.
- Simple movie clip effects with GIF animation.
- ◆ 10/100 BASE-T Ethernet interface.
- Convenient and easy screen editing.
- Strengthened data management (Logging, Recipe, and Alarm).
- Sead function of a controller's state information (Monitoring and maintenance).
- Multi-lingual display up to 4 languages and easy switching.
- Offline program simulation.
- Tag function of the HMI S/W (Easy to change the address of the graphic objects).
- USB host for the use of peripheral devices (Mouse, keyboard, printer, etc.)
- Sufficient memory space for screen saving (10MB).

# XET Panel XP Series Line Up

## A new and improved Windows CE-based HMI-





TFT color VGA (1024×768) 65,536 colors

#### 31Cm XP80-TTA (12.1")



TFT color SVGA (800×600) 65,536 colors

External Interface

#### 26Cm XP70-TTA (10.4'')



TFT color VGA (640×480) 65,536 colors

External Interface

#### External Interface



Serial 0000























USB I/F





USB I/F Expansion port




CF card I/F





Expansion port

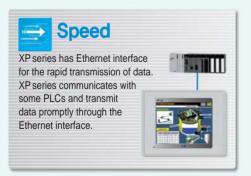





# SVGA





#### XP50-TTA



TFT color VGA (640×480) 65,536 colors

#### External Interface





USB I/F



Serial I/F(RS-232C)



CF card I/F



Serial I/F(RS422/485)



14Cm (5.7'')

### XP30-TTA/BTA



XP30-TTA TFT color / 65,536 colors QVGA (320×240)

XP30-BTA STN MONO (8-bit Gray) QVGA (320×240)

#### External Interface



Ethernet I/F



USB I/F



CF card I/F



Serial I/F(RS422/485)





XP30-BTE



STN MONO Economy (8-bit Gray) QVGA (320×240)

#### External Interface








Serial I/F(RS-232C) Serial I/F(RS422/485)







## XET Panel XP Series Feature

## Data processing

#### Faster transmission of mass storage data

- XP series' transmission speed is improved with the Ethernet interface. It is faster(10 /100Mbps) than RS-232C interface (115Kbps).
- XP series includes a 10 MB memory, so it can offer advanced features such as upload/download drawing data, Logging, Alarm, and Recipe.
- XP series supports GIF, WMF file type as well as BMP, JPG, which
  makes it easier to draw.



#### Easy accessible USB host


- → 2 channels of USB interfaces are installed as a host.
- ⇒ XP series is compatible to a variety of devices through the USB interface.






#### CF memory card and USB memory

- → You can save the PLC data to a CF memory card or a USB memory.
- ∃ It can be converted into CSV file type.

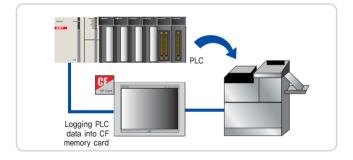

- Analog touch panel eliminates scale marks to improve the resolution as compared to the matrix touch panel. It adopts an analog resistive touch panel for the better visibility and the free disposition of objects.
- ∃ It helps free locating of the objects.

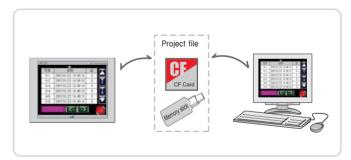


#### Multi-language support

- It offers a real-time conversion of four languages and various choices of language for designers.
- You can switch the languages which you want to use during the operation with the pre-recorded string table.





- ∃ It displays components of fixed values or word devices on the screen. Preset- component images can be used
- ∃ It provides a free movement with a user-defined path, a linear movement, and a device movement on the X-Y coordinates.

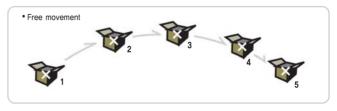





## Display


#### Diagnostic via program monitoring

- XP series' program monitoring function offers easy diagnostic without additional option to monitor PLC which is connected to HMI.
- → The ladder program can be saved in CF card or USB memory.
- ∃ It offers several functions such as device search, subroutine search, label search and step search.



#### Path-through


- When XGT Panel is connected to PLC via CPU port, monitoring and modification of PLC program can be done using Ethernet.
- The remote debugging can be executed.

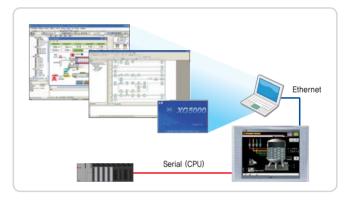

#### Useful simulator function


#### Offline simulation

- → Operation can be executed without hardware.
- → Program error can be checked before sending to XGT Panel.



#### Interworking with PLC simulator

➡ When LS PLC software, XG5000, is executed, XGT Panel simulator can be operated with XG5000 together.



#### RAPIEnet optic ring (XPO-EIMT)

- XPO-EIMT communication option card enables high speed communication via RAPIEnet.
- RAPIEnet is more reliable and convenient communication methods compared to START communication.



## XET Panel XP Series Feature

## **Project Printing**

Prompt display Advanced

#### Alarm

#### ∃ History alarm


It saves alarmed contents into a history file. You can classify the alarms in detail into the maximum 8 upper and lower class groups or alarm lists. Through the alarm explorer, you can choose some alarms to display. If you register a detailed screen to verify the alarms in detail, you can create a window which is connected to the alarms.

#### 

It displays a current alarm on the lower position of the screen for the rapid response to users. Flowing alarm can be configured to use only with a specific condition. You can apply it to transmit company or device information.

#### System alarm ■

If a serious fault or a trouble of the HMI occurs, the system alarm informs users.

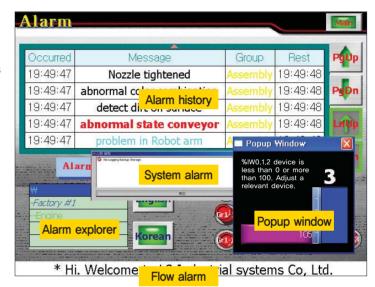

#### Easy management with backup files

Advanced

#### **Logging**

- It offers a cyclic logging operating repeatedly according to the time and a device status, and a conditional logging which works under the condition of the device.
- ➡ The max. number of 32 logging areas (condition) are available and each size of the area can be expanded up to 256Kbyte.
- ≥ It is capable of saving the maximum 32 Words (cf. 32 bits for the bit logging) by one logging.
- Logging is basically saved on the internal SRAM (256Kbyte), and you can run a back up to a CF memory, a USB memory and a movable HDD, etc.
- You can verify the logging data on the XGT Panel through the logging view object.
- Converted CSV types can be edited on Microsoft Excel.



#### Email service of alarm and logging data

Advanced

- XGT Panel offers the function of e-mail service to the registered address as a CSV file.
- It can send Logging data with the selected logging group.
- E-mail service includes the function of sending e-mails / notifications to the users when user-defined alert cases occur.
- The logging and alarm file sent to PC can be open with EXCEL.




# Alarm Script Data Up Wenien Logging

#### Recipe

Advanced

⊇ Recipes provide an easy method for operators and users to change
the value of hundreds of settings in automation devices. Backup
memory is installed, it makes it possible to use the recipe function to
transfer setting values to other equipment. It is able to register up to
32 recipes at the XP-Builder. The maximum 100 Word/Dword devices
and 16 data blocks are able to assign in each recipe. Recipe data is
saved in the nonvolatile memory of the XP series. It maintains the
latest data when the power is shut off. You can register and edit the
recipe data through the XGT Panel or Microsoft Excel.

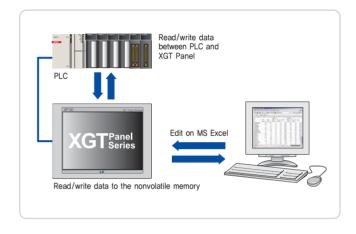

#### Scheduler


Advanced

Scheduler appoints operations and times to do the operation on the specified time. Bit On/Off, setting a Word value, and a script operation are available. Each scheduler can assign operations up to 8. Schedulers can be produced up to 32.




#### **Print**

You can print a screen or a history of alarm events from the HMI. It is available to connect to a printer with a USB port.

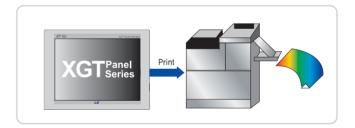

#### Bar code scan

ASCII data which is inputted by a bar code scanner can be saved into a user-defined PLC or an internal memory of the XGT Panel. User can set a completion bit to verify whether the XGT Panel read correct data. The bar code communication operates only with a builtin RS-232C interface of the XGT Panel.

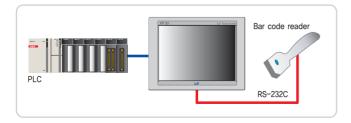

#### Security


When you operate the PLC control with Objects such as switches, input and output objects, you can prescribe the security level to the authorized users only. Total 10 security levels are supported, and a low level password can access to a higher level. After an approval of the security level, the session is only maintained during a period of time.




## XET Panel XP Series Software


## Development Tool: XP-Builder


#### **XP-Builder Functions**

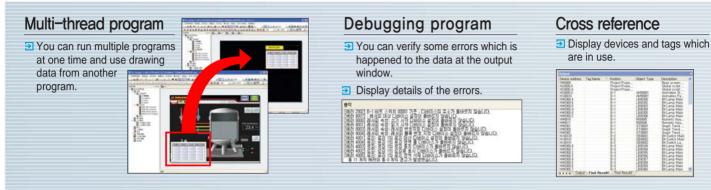

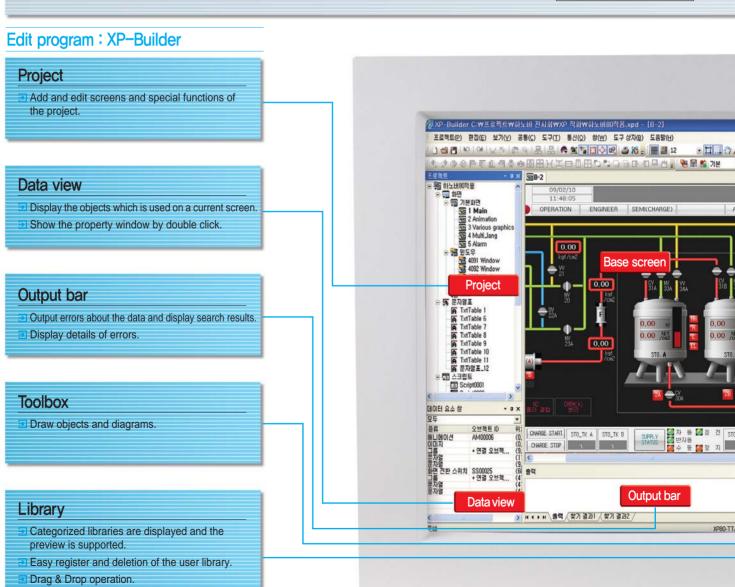



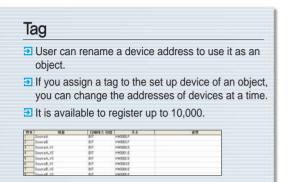

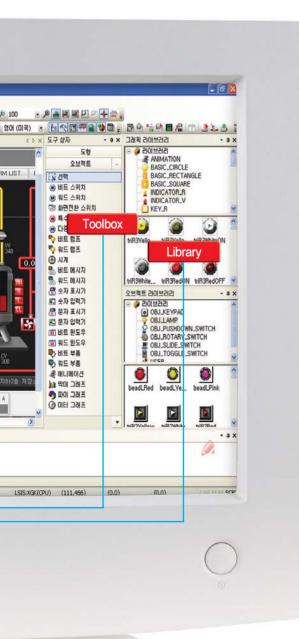

#### **Simulation**

#### Off-line program simulation

- 2 You can confirm the drawing data on a PC without a XGT Panel.
- Device monitoring and operation can be checked on a PC.
- The simulator supports same operations as a XGT Panel.
- Data errors and normal operations could be checked before XP-Builder transmits the drawing data to the HMI.

Arial : ABCDEFGHIJKLMNOPQRSTUVWXYZ Book : ABCDEFGHIJKLMNOPQRSTUVWXYZ Impact : ABCDEFGHIJKLMNOPQRSTUVWXYZ Helvetica : ABCDEFGHIJKLMNOPQRSTUVWXYZ Tahoma : ABCDEFGHIJKLMNOPQRSTUVWXYZ Verdana : ABCDEFGHIJKLMNOPQRSTUVWXYZ 가나다라마바사아자차카타파하 가나다라마바사아자차카타파하 가나다라마바사아자차카타파하 가나다라마바사아자차카타파하

#### **GIF** animation

You can use GIF animation to take effects according to the state of specified bit.
You can make and add a movie clip of the actual spot to inform users accurately.
(A movie clip file can be produced using a commercial GIF animator program.)



#### **Script**

#### Flexible script language

- Script language can supplement the offered object function to draw the data.
- ➡ Script language is a structured language such as C programming language for the convenience of users.
- 2 Script language with complex arithmetic operations and various functions can reduce a load of external controllers.
- Grammar inspection can validate the script languages.

#### Various script use

- 3 XP-Builder has various script usages such as global script, object script, etc.
- Global script operates with On/Off signal of an assigned device. It is able to run a script operation by periods using a special device.
- The object script is available to do a target device operation of the object.
- Script can be operated at the moment when a screen is opened(or closed).


#### Useful script toolbox and error inspection.



## XET Panel XP Series Specification

## Interface and system organization


#### XGT Panel provides reliable quality and responsible technology

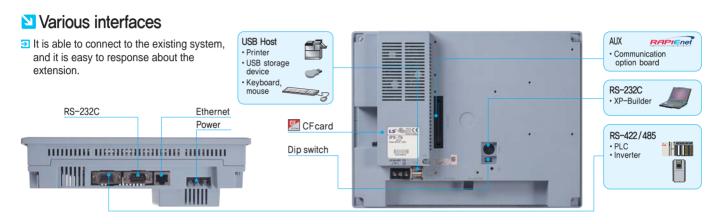

#### System organization


#### 1: 1 Serial / Ethernet communication

One PLC to one XGT Panel

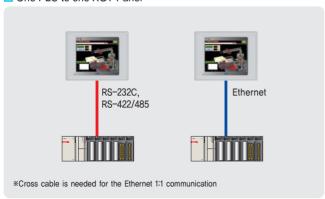


#### N: M (Ethernet communication)

■ Multiple PLCs to multiple XGT Panels

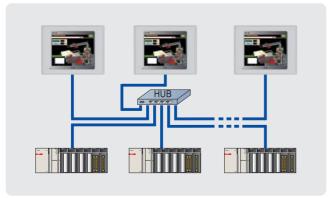


#### 1: N Serial communication

Multiple PLCs to one XGT Panel

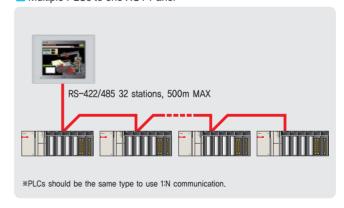

#### Simultaneous communication with 4 controllers

∃ 4 kinds of PLCs to one XGT Panel

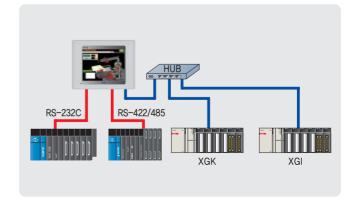


## Cable

#### The technology began to offer better operating environment

#### Cable standards and wiring method

#### ■ Ethernet cable standards and wiring

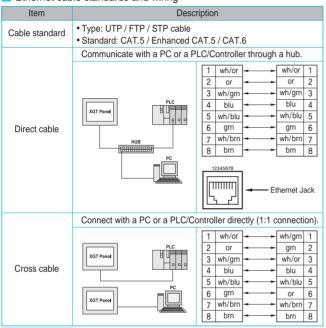


- 1) Ethernet setting
  - Ethernet setting is on the XGT Panel. Communication parameters with a PLC/controller are set up on the XP-Builder
- 2) 1:1 connection
  - Under the conditions that is impossible to use a LAN, a one-to-one connection with a cross cable is suited to send/receive a project data.

#### 3) Making a cable

- If a Lock part of the Ethernet jack is damaged, it cannot be fixed to a RJ45 connector (Ethernet connector). It occurs a contact badness.

  A Plug Cover is recommended.

#### ■ Tool cable standards and wiring

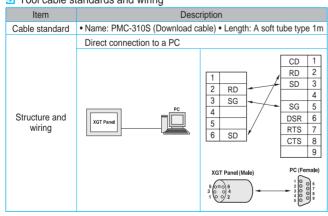

#### ⇒ XP30-BTE connector pin assignment

Z /														
Item	Description													
	1 2 3 4 5 6 7 8 9 TX RX SG TX+ TX- RX+ RX- SG FG													
Wiring	RS-232C RS-442/485C FG													
	1 2 3 4 5 6 7 8 9													

#### ≥ RS-232C cable standards and wiring

Item	Description										
Cable standard	(UL) Style 2464 AWG24 cable     Max cable length is 15m.     Shielded cables are recommer										
	Connect to PLC or Controller (	1:1).									
Structure and wiring	XGT Panel	• Connector pin of the XGT Panel • D-Sub 9P, Male connector  1									

- 1) Communication setting
- Communication parameters with a PLC/controller are set up on the XP-Builder.
- Refer to the communication user manual about the communication wiring with a PLC/controller
   XGT Panel does not support a flow control.
- 2) Making a cable
  - Number of Conditions that is impossible to use a LAN, a one-to-one connection with a cross cable is suited to send/receive a project data.

     Make a cable meet PLC/controller's standard requirements.

#### ■ RS-422/485 cable standards and wiring


	cable claridarde and willing	
Item	Desci	ription
Cable standard	(UL) Style 2464 AWG22 cable     Max cable length is 500m.     Shielded cables are recommentary.	
	Connect to PLC or Controller (	1:1).
Structure and wiring	NOT Freed    NOT Freed   NOT F	• Connector pin of the XGT Panel • D-Sub 9P, Female connector    1


- Communication setting
   Communication parameters with a PLC/controller are set up on the XP-Builder.
  - $\bullet \, \text{Refer to the communication user manual about the communication wiring with a PLC/controller}. \\$ · Set up a terminal resistance using a dip switch.
- 2) Making a cable
- A cable should be produced as a male type because the XGT Panel's connector is a female type.
- Connect the 4th(TX+) to the 8th(RX+) and the 5th(TX-) to the 9th(RX-) to make a RS-485 cable


	Description of the switch							
DIP switch	1	No use						
	2	Α	Normal operation (Default)					
4 3 2 1		В	Update Windows CE					
вІппппІ	3	Α	Watchdog On (Default)					
	J	В	Watchdog Off					
	4	Α	RS-422/485 terminal resistance (120Q)					
	4	В	No RS-422/485 terminal resistance					


## XET Panel XP Series Specification


#### Dimension



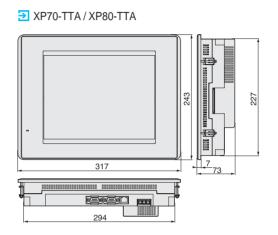

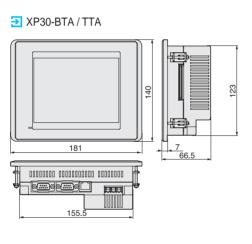

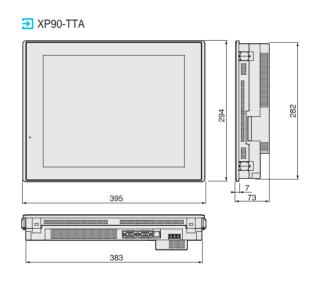

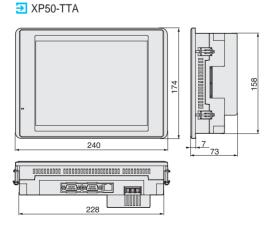

#### ☑ General information

No.	Item		Descr	iption		Standard									
1	Ambient temperature		0℃~	+50℃											
2	Storage temperature		-20℃ ~	+60°C											
3	Ambient humidity		10~85 % RH, without dew condensation 10~85 % RH, without dew condensation												
4	Storage humidity														
		Frequency	Acceleration	Amplitude											
	Vibration resistance	5≤f<9Hz	-	3.5 mm											
5		9 ≤ f ≤ 150 Hz	10 times												
			IEC 61131-2												
		Frequency	Acceleration	Amplitude	(X, Y, and Z)										
		5≤f<9Hz	-	1.75 mm											
		9 ≤ f ≤ 150 Hz	4.9 %	-											
6	Shock resistance	* Maximum shock acceleration: 1	47% (15g) * Authorization time: 1	1 <sub>ms</sub> * Pulse waveform: Half-sine w	rave (3 times each of X, Y, and Z)	IEC 61131-2									
		Square wave impulse noise		AC: $\pm 1,500 \text{V}$ DC: $\pm 1,000 \text{V}$		LSIS Standards									
7	Noise resistance	Noice registance Electrostatic discharge Voltage : 6kV (Contact discharge)													
′	Noise resistance	Radiated electromagnetic field noise 27 ~ 500 MHz, 10 V/m													
		Fast transient / Burst noise	Power module / Digital IO	face 2kV / 1kV	IEC 61131-2, IEC 61000-4-4										
8	Operating ambience		Free from corrosive gas	ses and excessive dust											
9	Altitude		Up to 2,000	m(6,562ft)											
10	Pollution degree		Less than	equal to 2											
11	Cooling method		Air-co	poling											

#### Specification

Item			XP30-BTE/DC	XP30-BTA/DC	XP30-TTA/DC	XP50-TTA/DC	XP70-TTA/AC XP70-TTA/DC	XP80-TTA/AC XP80-TTA/DC	XP90-TTA/AC					
			Mo	no	Color									
Display de	escription		Mono B	lue LCD	TFT Color LCD									
Display Si	ze (inch)			14cm (5.7")		21cm (8.4")	26cm (10.4")	31cm (12.1")	38cm (15")					
Resolution	1			320×240		640>	<480	800×600	1024×768					
Color			8-bit Gra	ay Scale	65,536 color									
Backlight			LE	D	CCFL (whole LCD), auto On/ Off (50,000hr)  CCFL (whole LCD), auto On/ Off (50,000hr)									
Contrast			Adjus	stable			Fixed							
Luminano	-		2300	cd/m²	400cd/m <sup>2</sup>	480cd/m <sup>2</sup>	430cd/m <sup>2</sup>	400cd/m <sup>2</sup>	450cd/m <sup>2</sup>					
Viewing	Up/Down(Deg		20/40	20/40	70/50	60/50	65/45	75/45	60/50					
angle	Left/Right(Deg	gree)	45/45	45/45	70/70	65/65	65/65	65/65	75/75					
Touch pa	nel			4-wire system, analog			8-wire system	, ,						
LED				Green : Run (Mo	0,	0 , (	Communication error, dr	awing data error)						
Processo	or		ARM920T(32bit RISC), 200MHz											
Memory	Display data		3MB	3MB 10MB 20MB										
Welliory	Backup data		128KB	KB 512KB (Logging, alarm data saving)										
Ethernet			-			1ch, IEEE802.3	3, 10/100Base-T							
USB interf	ace		USB Host X 1	USB Host X 1 USB Host X 2										
Serial	RS-232C		2ch (1 port for PC communication)											
Octiai	RS-422/485			1ch, 422/485										
	ory card inter	face	-			CF memory ca	rd (TYPE-I) X1							
AUX interfa	ace		-			Opt	ional							
Certification	on		CE, UL, KCC											
Protection					IP65F	(Front Water Proof Str	,							
Size (W×	•		181 x 140 x 56.5	181 x 140 x 66.5		240 x 174 x 73	317 x 2	43 x 73	395 x 294 x 73					
	(W×H)mm			155.5 x 123		228 x 158	294 )		383 x 282					
Weight (kg	Weight (kg) 0.62 0.75 1.4 2.2 2.4							2.4	3.9					
	Rated voltage	,		DC	24V		AC100~220	OV, DC 24V	AC100~220V					
	Permitted	AC			-		MIN 85 VAC, I		MIN 85 VAC,					
Power	voltage	DC		MIN 19.2 VDC,	MAX 28.8 VDC		MIN 19.2 VDC,	MAX 28.8 VDC	MAX 264 VAC					
	Watt	AC	-		-	-	37	40	46					
	vvall	DC	5	8	.5	20	27	30	40					

### ■ Controller with connectivity

						-																
				LS				MODICON		Mitsubis	hi	(	OMRON	1	OEMax		Rock	well		KDT	DasaRobot	Matsushita
Maker	GLOFA-GM Series	Master-K Series	XGK Series	XGB Series	XGI Series	LS버스 [인버터]	IG5 MODBUS	MODBUS	Melsec Q	Melsec AnN, AnS	Melsec FX	C200H/HS/ 500/1000	CQM1H	CS1G/IH, CJIG/1H	NX-CCU+	SLC500	Micro Logix	Control Logix	Campact Logix	CIMON	iM-SIGMA	FP
CPU Port	•	•	•	•	•	-	-	-	•	-	-	-	_	-	-	•	-	_	-	-	-	-
Link	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	_	-	-	-	•	•	•
Link [1:N]	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	_	-	_	-	•	•	•
Ethernet	•	•	•	•	•	-	-	•	•	-	-	•	-	•	-	-	Ethernet/IP	Ethernet/IP	Ethernet/IP	-	_	-

#### Leading Innovation, Creating Tomorrow



- For your safety, please read user's manual thoroughly before operating
- · Contact the nearest authorized service facility for examination, repair, or adjustment.
- · Please contact qualified service technician when you need maintenance. Do not disassemble or repair by yourself!
- Any maintenance and inspection shall be performed by the personnel having expertise concerned.

© 2008.01 LS Industrial Systems Co., Ltd. All Rights Reserved.

## LS Industrial Systems Co., Ltd.

#### **■ HEAD OFFICE**

LS Tower 1026-6, Hogye-dong, Dongan-gu, Anyang-si, Gyeonggi-do 431-848, Korea

Europe +82-2-2034-4376 / ywsohn@lsis.biz ■ Middle East +82-2-2034-4901 / bonseongk@lsis.biz South West Asia +82-2-2034-4645 / sungkyup@lsis.biz **South East Asia** +82-2-2034-4707 / ohpark@lsis.biz - CIS +82-2-2034-4913 / jinhkang@lsis.biz - America +82-2-2034-4377 / younsupl@lsis.biz

Specifications in this catalog are subject to change without notice due to continuous product development and improvement.

#### ■ Global Network

• LS Industrial Systems (Middle East) FZE >> Dubai, U.A.E. Address: P.O.Box-114216, API World Tower, 303B, Sheikhe Zayed Road, Dubai, U.A.E. Tel: 971-4-886 5360 Fax: 971-4-886-5361 e-mail: hwyim@lsis.biz

• Dalian LS Industrial Systems Co., Ltd. >> Dalian, China

Address: No.15, Liaohexi 3-Road, Economic and Technical Development zone, Dalian 116600, China Tel: 86-411-8273-7777 Fax: 86-411-8730-7560 e-mail: lixk@lsis.com.cn

 LS Industrial Systems (Wuxi) Co., Ltd. >> Wuxi, China
 Address: 102-A, National High & New Tech Industrial Development Area, Wuxi, Jiangsu,214028, P.R.China Tel: 86-510-8534-6666 Fax: 86-510-522-4078 e-mail: xuhq@lsis.com.cn

• LS-VINA Industrial Systems Co., Ltd. >> Hanoi, Vietnam

Address: Nauven Khe - Dong Anh - Ha Noi - Viet Nan

Tel: 84-4-882-0222 Fax: 84-4-882-0220 e-mail: srjo@lsisvina.com • LS-VINA Industrial Systems Co., Ltd. >> Hochiminh , Vietnam

Address: 41 Nguyen Thi Minh Khai Str. Yoco Bldg 4th Floor, Hochiminh City, Vietnam Tel: 84-8-3822-7941 Fax: 84-8-3822-7942 e-mail: sbpark@lsisvina.com

• LS Industrial Systems Tokyo Office >> Tokyo, Japan
Address: 16FL, Higashi-Kan, Akasaka Twin Tower 17-22, 2-chome, Akasaka, Minato-ku Tokyo 107-8470, Japan
Tel: 81-3-3582-9128 Fax: 81-3-3582-2667 e-mail: jschuna@lsis.biz

• LS Industrial Systems Shanghai Office >> Shanghai, China
Address: Room E-G, 12th Floor Huamin Empire Plaza, No.726, West Yan'an Road Shanghai 200050, P.R. China

Tel: 86-21-5237-9977 (609) Fax: 89-21-5237-7191 e-mail: jinhk@lsis.com.cn

LS Industrial Systems Beijing Office >> Beijing, China
 Address: B-Tower 17FL.Beijing Global Trade Center B/D. No.36, BeiSanHuanDong-Lu, DongCheng-District, Beijing 100013, P.R. China

Tel: 86-10-5825-6025.7 Fax: 86-10-5825-6026 e-mail: cuixiaorong@lsis.com.cr

• LS Industrial Systems Guangzhou Office >> Guangzhou, China

Address: Room 1403,14F,New Poly Tower,2 Zhongshan Liu Road,Guangzhou, P.R. China Tel: 86-20-8326-6764 Fax: 86-20-8326-6287 e-mail: linsz@lsis.biz

• LS Industrial Systems Chengdu Office >> Chengdu, China Address: 12Floor, Guodong Building, No52 Jindun Road Chengdu, 610041, P.R. China Tel: 86-28-8612-9151 Fax: 86-28-8612-9236 e-mail: yangcf@lsis.com.cn

• LS Industrial Systems Qingdao Office >> Qingdao, China
Address: 7B40,Haixin Guangchang Shenye Building B, No.9, Shandong Road Qingdao 26600, P.R. China
Tel: 86-532-8501-6568 Fax: 86-532-583-3793 e-mail: lirj@lsis.com.cn

2009.05

LS XGT Panel Series(E) 2008. 01/(03) 2009. 05 Printed in Korea

www.lsis.biz